

Fig. 1

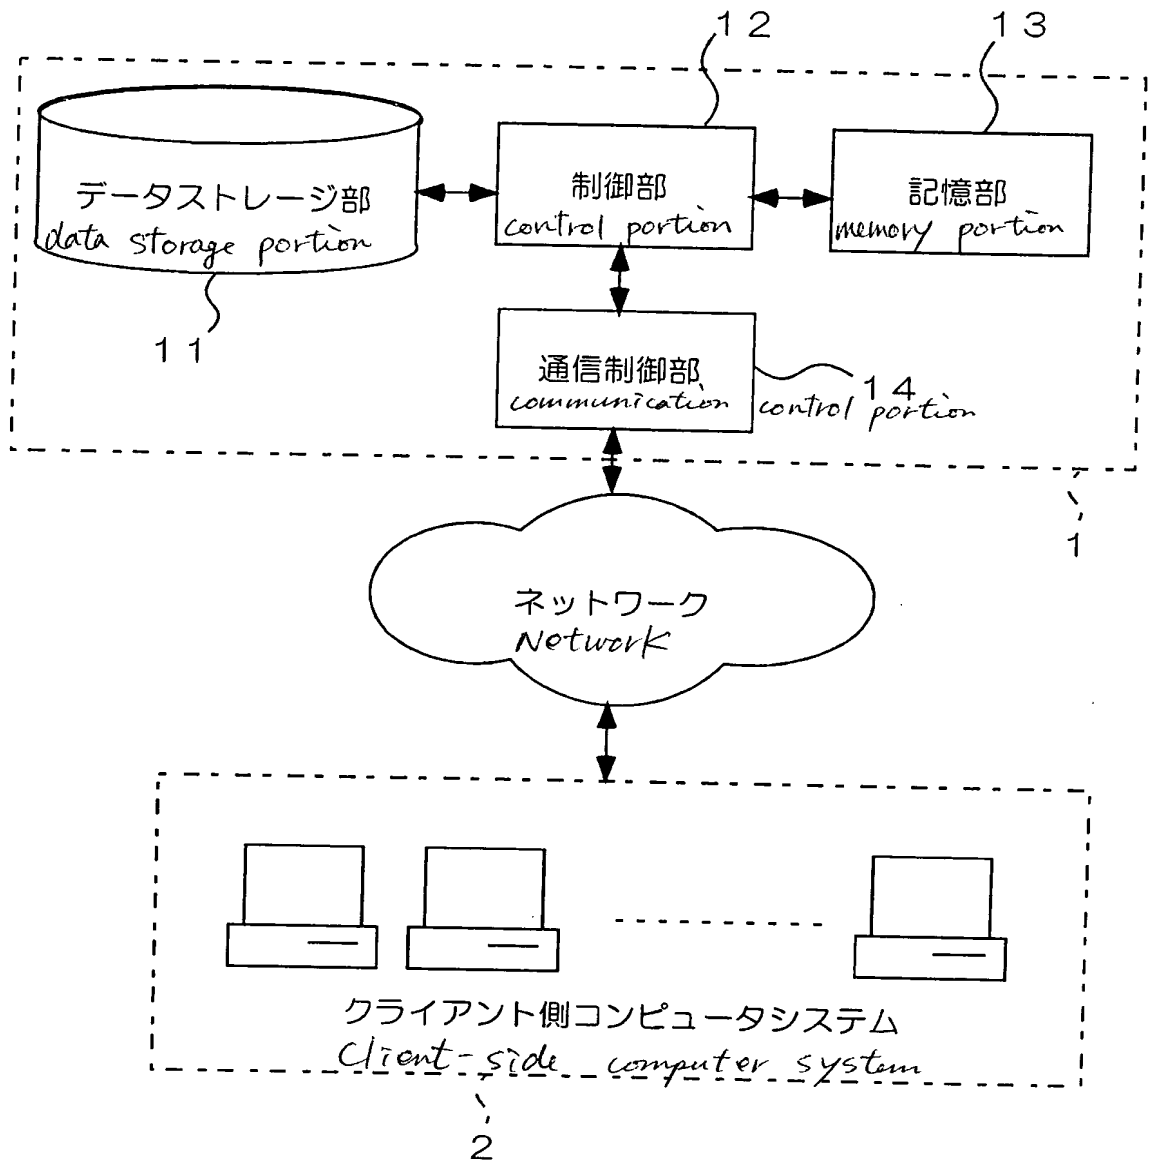


Fig. 2A


characteristic value 特徴量	actual data 実体データ
a a a a	b b b b b...
c c c c	d d d d d d...
⋮	⋮

Fig. 2B

characteristic value 特徴量	actual data or sequence of characteristic value 実体データ又は特徴量列
a a a a	b b b b b...
e e e e	d d d d d d...
⋮	⋮
x x x x	a a a a, e e e e...
⋮	⋮


Fig. 3

実体データ actual data




data fragment
データフラグメント

↓ (S1)



characteristic value
特徴量


↓ (S2)



↓ (S3)

secondary
characteristic value
二次特徴量

(S4)



(S5)

$\alpha 1$	$a 1$
$\alpha 2$	$a 2$
\vdots	\vdots
ε	$\alpha 1, \alpha 2, \dots \alpha N$

Fig. 4

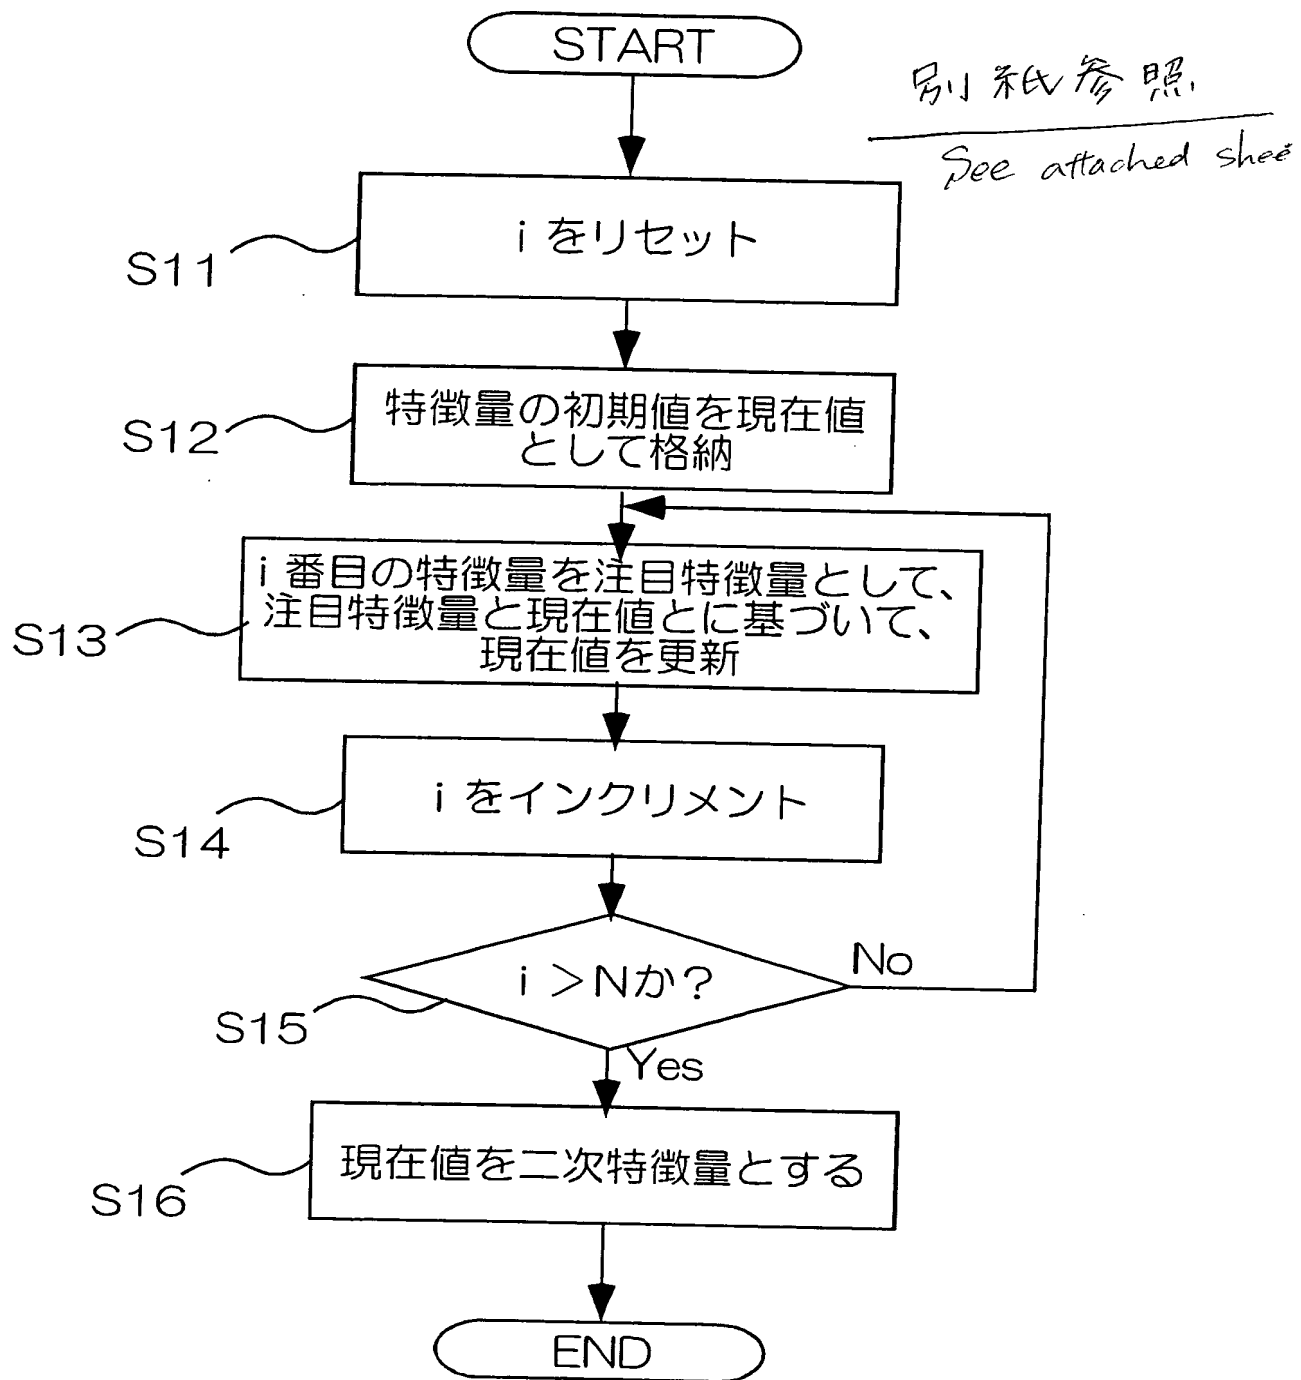


Fig. 4

- S11: Reset i .
- S12: Store the initial value of a characteristic value as a current value.
- S13: Update the current value on the basis of the i -th characteristic value as a target characteristic value and the current value.
- S14: Increase i by one.
- S15: $i > N$?
- S16: Set the current value as the secondary characteristic value.